

LAC 950 SLF

TYPE II

15 YEARS
GARANTIE - WARRANTY

FINITION  **WELDABLE PVDF**
CLEANGARD SLF

Zgrzewalny obustronnie
PVDF lakier




950 g/m²



M2/B1/BS
NFA701
B-S2-D0



3m

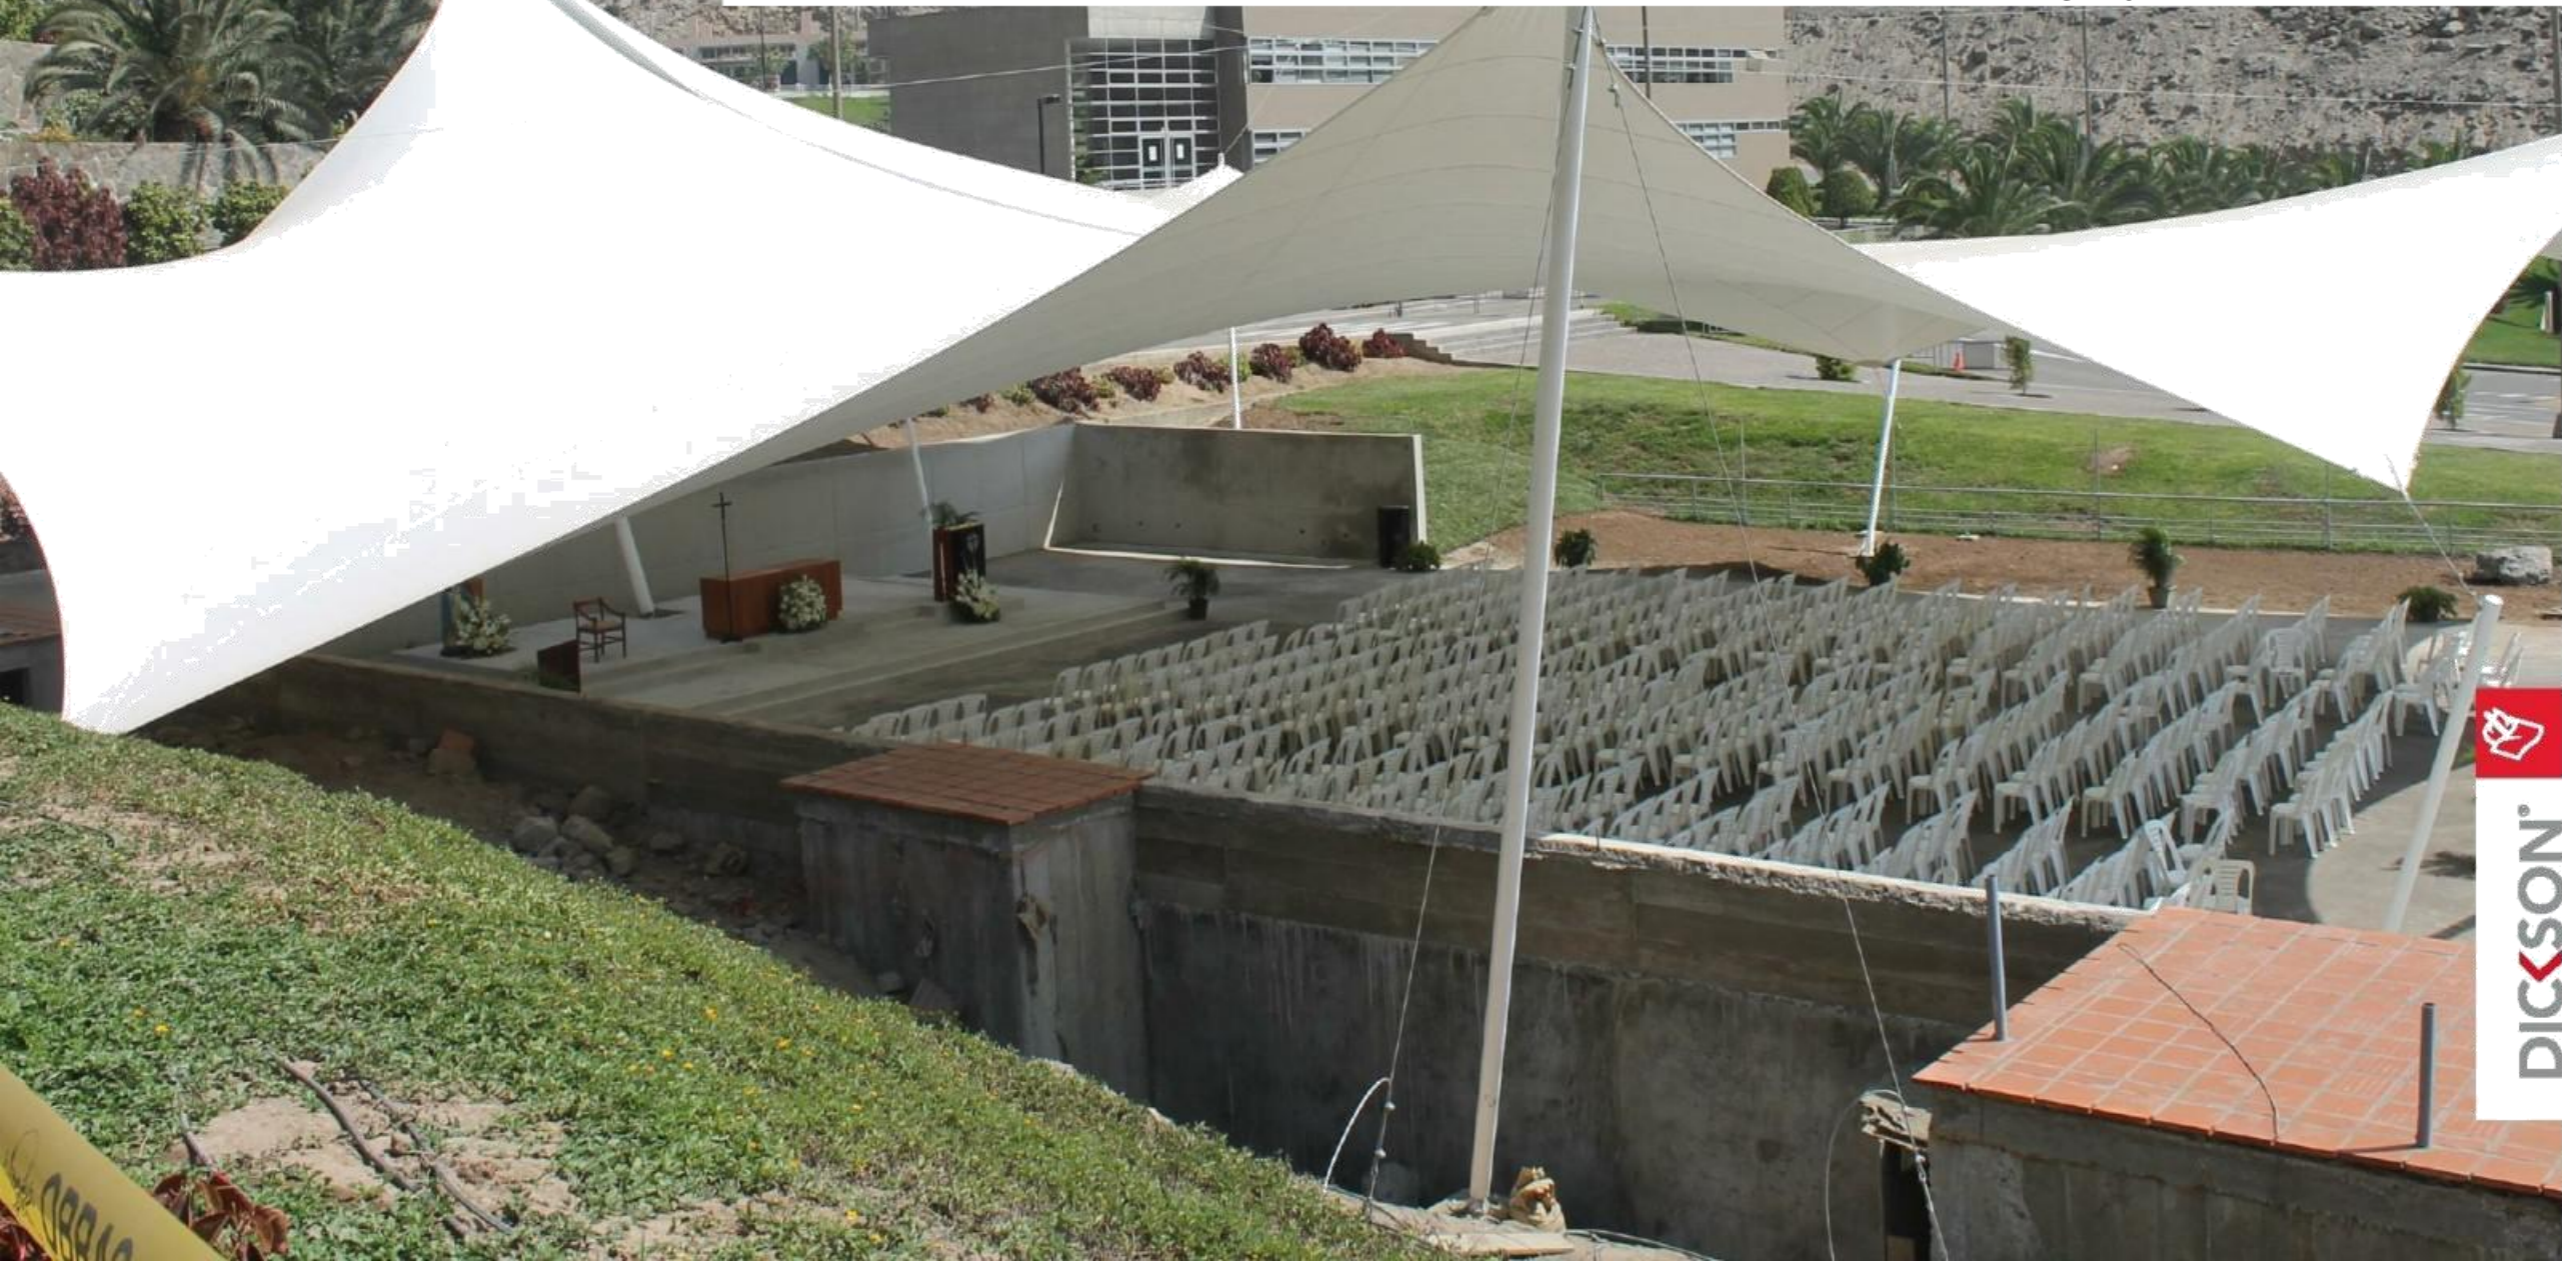

DICKSON
COATINGS

LAC 950 SLF TYPE II

Nośnik <i>Support / Trägergewebe / Soporte / Supporto</i>	1100 dtex PESHT
Szerokość <i>Laize / Breite / Ancho / Altezza</i>	3.00 m
Powłoka <i>Enduction / Beschichtung / Revestimiento / Spalmatura</i>	PVC (Lowick)
Wykończenie <i>Finition / Besrüstung / Acabado / Finizione</i>	Cleangard SLF
Ciężar całkowity <i>Poids Total / Gesamtgewicht / Peso total / Peso totale</i>	950g/m ²
Wytrzymałość na rozerwanie > NF EN ISO 1421 <i>Résistance rupture / Reissfestigkeit / Resistencia a la rotura / Resistenza alla rottura</i>	400/400 daN



78

Odbicie energii słonecznej (%)
Reflexion Solaire (%) / Wärme Reflektion (%)
Reflexión solar (%) / Riflessione Solare (%)



8

Pochłanianie energii słonecznej (%)
Absorption Solaire (%) / Wärme Absorption (%)
Absorción Sollar (%) / Assorbimento Solare (%)

**Gtot
EXT**

0.07

Współczynnik słoneczny kombinacji tkaniny + referencja szklenia C
Facteur solaire de l'ensemble toile + vitrage de référence C
Gesamtenergiedurchlassgrad der Kombination Verglasung C + Sonnenschutz
Factor solar de la ombinación del tejido + vidrio de referencia C
Fattore solare dell'insieme telo + vetro di riferimento C



**SYSTEM
LOWICK**

MADE IN
FRANCE



**FINITION
CLEANGARD**

REACH
COMPLIANCE

vinyl plus
COMMITTED TO
SUSTAINABLE DEVELOPMENT

DICKSON
COATINGS

www.dickson-coatings.com



GLEN RAVEN